


CITY OF RICHLAND
DEVELOPMENT SERVICES DEPARTMENT
625 Swift Boulevard, MS-35
Richland, WA 99352

Telephone 509- 942-7794 Fax 509- 942-7764

CI.RICHLAND.WA.US · 509-942-7390

COMMERCIAL STAIRWAYS, HANDRAILS, GUARDRAILS AND SPACING

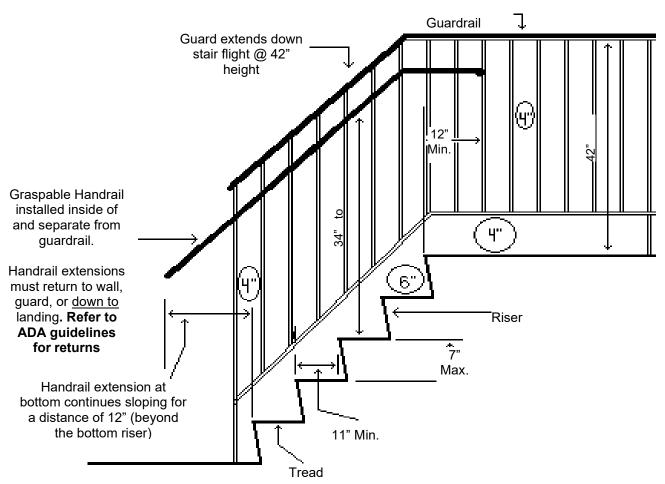

Graspable handrails at **34" to 38"** shall occur on both sides of the stairway (graspable details on reverse of this sheet).

Both handrails shall extend 12" beyond top riser and minimum 12" beyond bottom riser.

Stairway shall be not less than 44" wide (some exceptions for small commercial buildings).

Riser = 7" max. Tread = 11" min.

Stairways shall have a minimum headroom clearance of **80**" measured vertically from a line connecting the edge of the nosings.

If stairway is open-sided, a complying guardrail as shown must be installed – spacing of rails such that a **4" sphere** cannot pass through the opening; space between stair and bottom rail (if any) such that a **6" sphere** cannot pass through.

GRASPABLE HANDRAIL DETAILS

